
BRIDGE · +9.30 m

Navigation & chart lounge · Layout resolved, not dimensioned

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

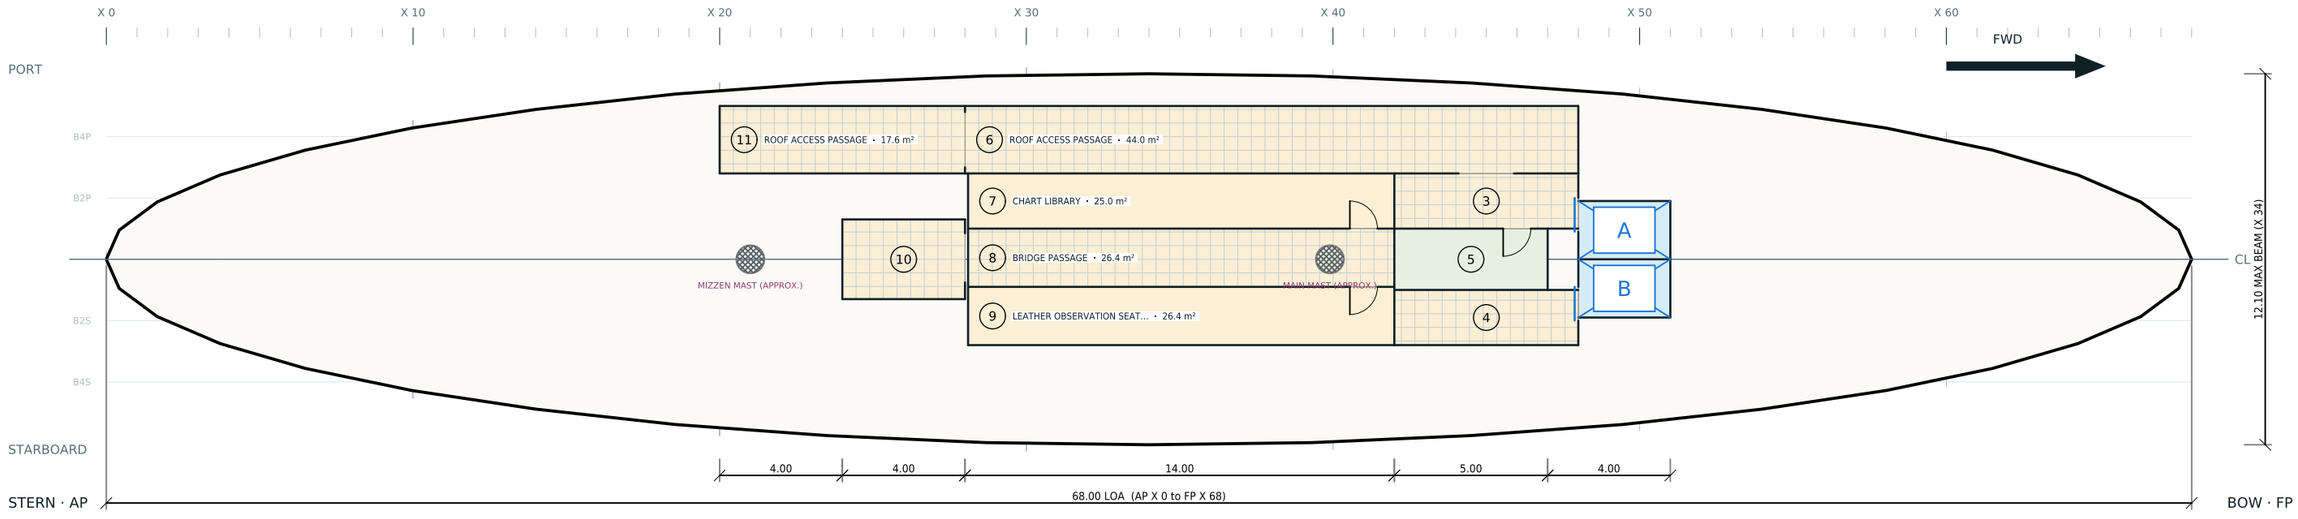

ROOM SCHEDULE

NO.	ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
1	Mag-rail lift A	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
2	Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
3	Bridge lift lobby	6.00 × 1.80	10.8	Calacatta marble, book-matched	Inferred, to check
4	Bridge lift lobby	6.00 × 1.80	10.8	Calacatta marble, book-matched	Inferred, to check
5	Command position	5.00 × 2.00	10.0	Bookmatched walnut floor, brass inlay	Read from GA sheet
6	Roof access passage	20.00 × 2.20	44.0	Honed limestone, brass threshold strips	Inferred, to check
7	Chart library	13.90 × 1.80	25.0	Bookmatched walnut floor, brass inlay	Inferred, to check
8	Bridge passage	13.90 × 1.90	26.4	Honed limestone, brass threshold strips	Inferred, to check
9	Leather observation seating	13.90 × 1.90	26.4	Bookmatched walnut floor, brass inlay	Inferred, to check
10	Protected bridge access	4.00 × 2.60	10.4	Honed limestone, brass threshold strips	Inferred, to check
11	Roof access passage	8.00 × 2.20	17.6	Honed limestone, brass threshold strips	Inferred, to check
	ASSIGNED		192.8	of 644 m² deck outline (30%)	

GENERAL NOTES

1. Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).
2. Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.
3. Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.
4. Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.
5. Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.
6. Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK
A	10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

REFERENCE DRAWINGS

P68-KETCH-D General Arrangement schematic (source of room positions)
P68-KETCH-E Vertical space schedule (deck levels)
P68-ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf
elevation-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria


DECK STATUS

Stage	Layout resolved, not dimensioned
Datum	+9.30 m above DWL, to +11.70
Zone	Navigation & chart lounge
Assigned	193 m² of 644 m² (30%)
Rooms	1 from GA · 0 resolved · 10 inferred
Lift stops	lift A, lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 48 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	None cleared for release (+3 restricted)

OPEN ITEMS

1. Roof level (+9.30 m) assumed equal to the Bridge floor; not confirmed on any sheet.
2. Roof access door sits about 0.5 m outboard of the roof edge: check the roof outline.
3. Window glare at the command position not checked.
4. Positions read from the schematic at about 14 px per metre.

KEY PLAN · LONGITUDINAL

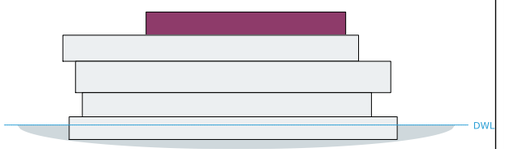

LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

P68 KETCH

68 m expedition sailing ketch · concept design

ENGINEERING DECK PLAN · BRIDGE

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-01	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE decks-layout.json	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 1 of 5

COMMANDER / LIDO · +6.60 m

Forward lookout · aft hospitality · Layout resolved, roof under design

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

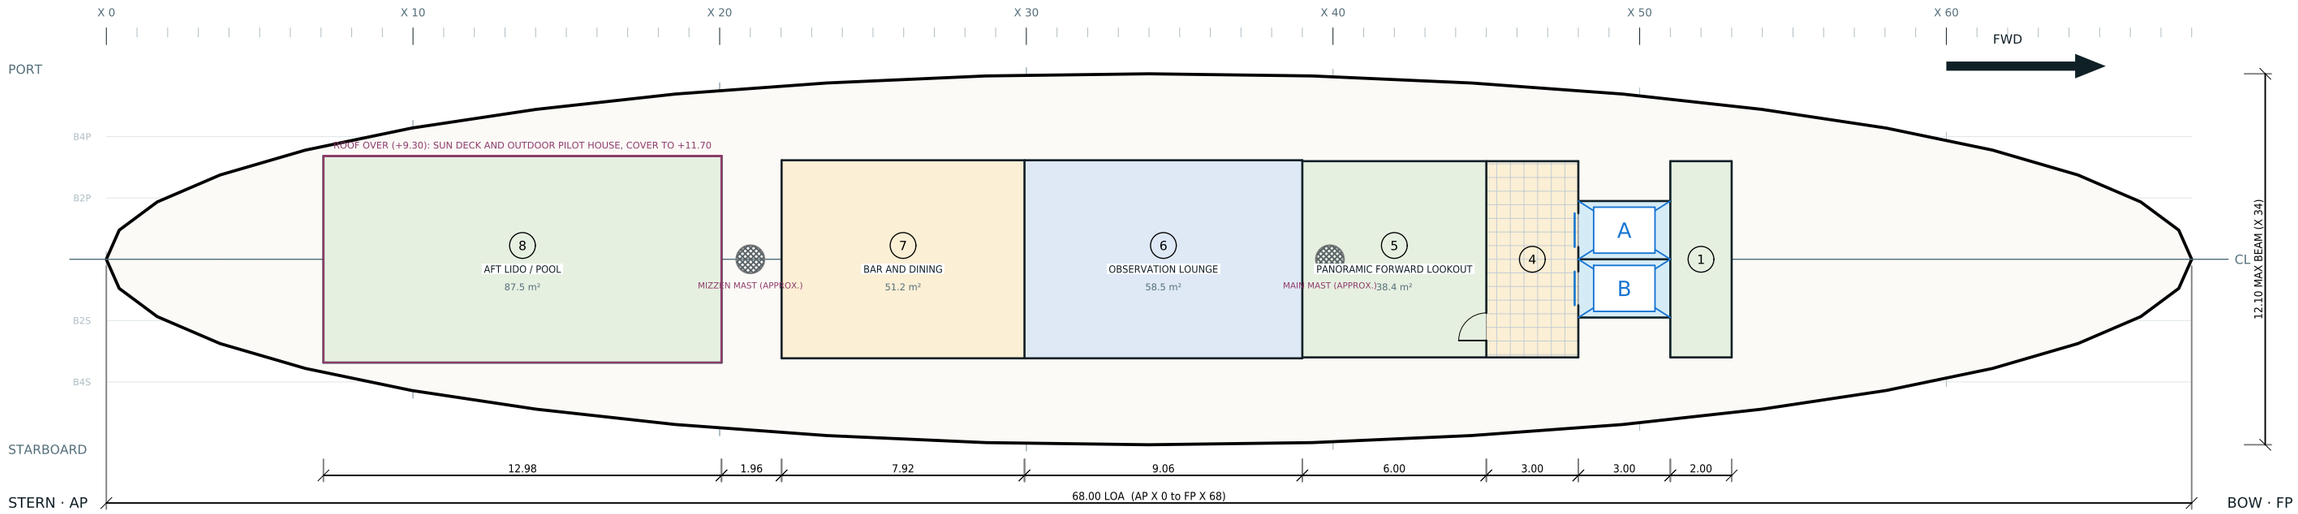

ROOM SCHEDULE

NO.	ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
1	Panoramic forward lookout	2.00 × 6.40	12.8	Bookmatched walnut floor, brass inlay	Read from GA sheet
2	Mag-rail lift A	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
3	Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
4	Commander lift lobby	3.00 × 6.40	19.2	Calacatta marble, book-matched	Inferred, to check
5	Panoramic forward lookout	6.00 × 6.40	38.4	Bookmatched walnut floor, brass inlay	Read from GA sheet
6	Observation lounge	9.06 × 6.46	58.5	Bookmatched walnut floor, brass inlay	Resolved decision
7	Bar and dining	7.92 × 6.46	51.2	Laid teak deck, caulked seams	Inferred, to check
8	Aft Lido / pool	12.98 × 6.74	87.5	Laid teak deck, caulked seams	Read from GA sheet
	ASSIGNED		279.0	of 644 m² deck outline (43%)	

GENERAL NOTES

1. Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).
2. Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.
3. Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.
4. Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.
5. Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.
6. Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.


DECK STATUS

Stage	Layout resolved, roof under design
Datum	+6.60 m above DWL, to +9.30
Zone	Forward lookout · aft hospitality
Assigned	279 m² of 644 m² (43%)
Rooms	3 from GA · 1 resolved · 4 inferred
Lift stops	lift A, lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 48 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Glassware storage (+3 restricted)

OPEN ITEMS

1. Pilot house cover footprint not set; roof extent shown.
2. Roof: second escape route, guard rails and crowd load not designed.
3. Pool mass and free surface to be engineered.
4. Mizzen interface with the aft deck structure unresolved.

KEY PLAN · LONGITUDINAL

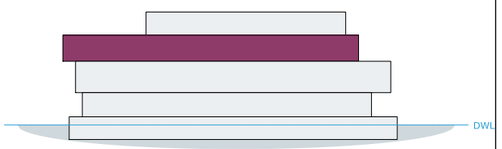

LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK
A	10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

REFERENCE DRAWINGS

P68-KETCH-D General Arrangement schematic (source of room positions)
P68-KETCH-E Vertical space schedule (deck levels)
P68-ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf
elevation-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria

P68 KETCH

68 m expedition sailing ketch · concept design

ENGINEERING DECK PLAN · COMMANDER / LIDO

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-02	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE decks-layout.json	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 2 of 5

MAIN / MASTER · +3.35 m

Owner and social spaces · Layout resolved, interiors not detailed

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

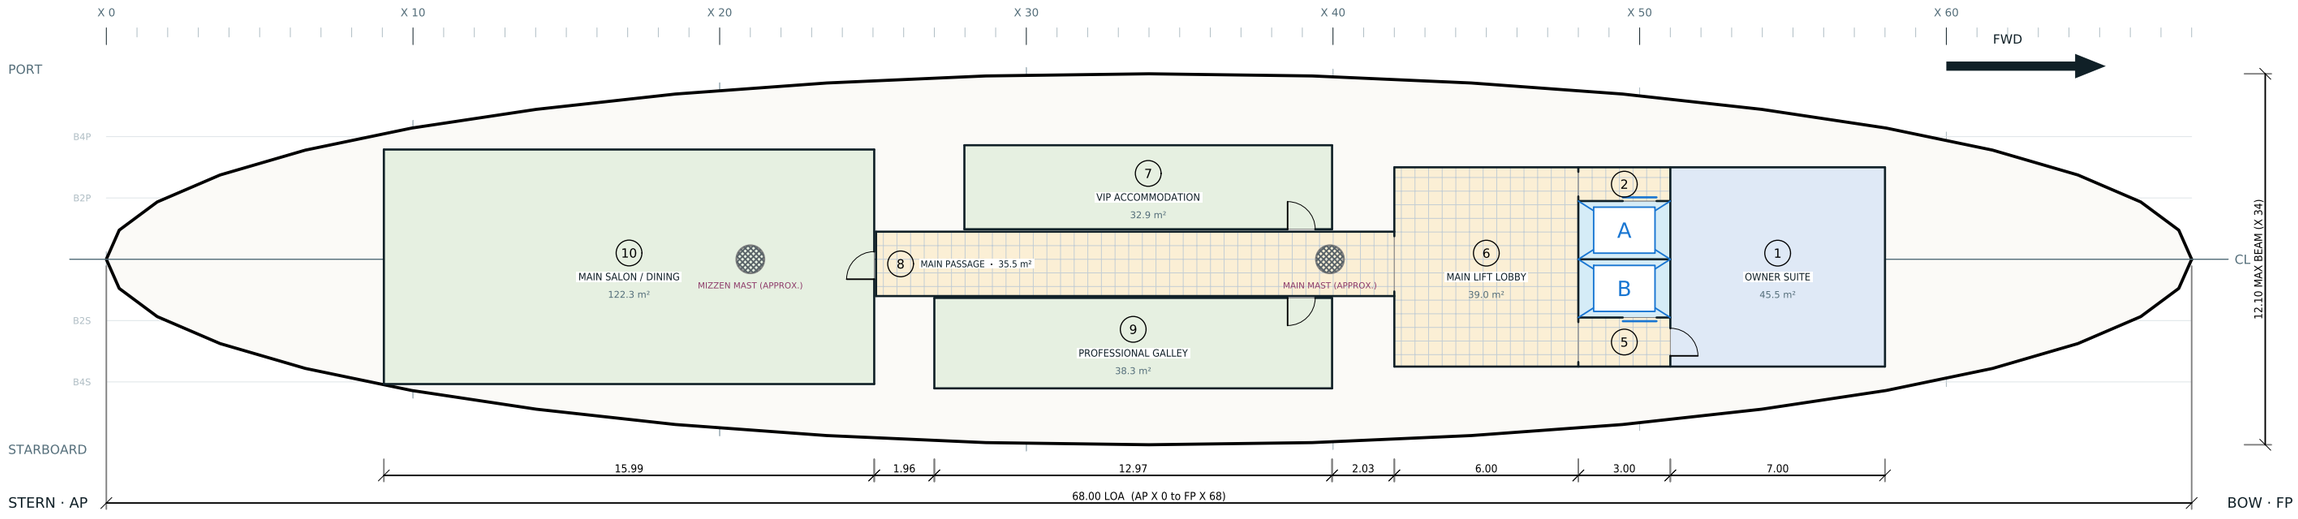

ROOM SCHEDULE

NO.	ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
1	Owner suite	7.00 × 6.50	45.5	Wool-silk carpet, ivory	Resolved decision
2	Main lift lobby	3.00 × 1.10	3.3	Calacatta marble, book-matched	Inferred, to check
3	Mag-rail lift A	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
4	Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
5	Main lift lobby	3.00 × 1.60	4.8	Calacatta marble, book-matched	Inferred, to check
6	Main lift lobby	6.00 × 6.50	39.0	Calacatta marble, book-matched	Inferred, to check
7	VIP accommodation	11.99 × 2.74	32.9	Wool-silk carpet, ivory	Read from GA sheet
8	Main passage	16.90 × 2.10	35.5	Honed limestone, brass threshold strips	Inferred, to check
9	Professional galley	12.97 × 2.95	38.3	Porcelain tile, anti-slip R11	Read from GA sheet
10	Main salon / dining	15.99 × 7.65	122.3	Bookmatched walnut floor, brass inlay	Read from GA sheet
	ASSIGNED		332.9	of 644 m² deck outline (52%)	

GENERAL NOTES

1. Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).
2. Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.
3. Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.
4. Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.
5. Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.
6. Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.


DECK STATUS

Stage	Layout resolved, interiors not detailed
Datum	+3.35 m above DWL, to +6.60
Zone	Owner and social spaces
Assigned	333 m² of 644 m² (52%)
Rooms	3 from GA · 1 resolved · 6 inferred
Lift stops	lift A, lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 48 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Food waste processing, Food storage, Kitchen accommodation, Bathroom accommodation (+1 restricted)

OPEN ITEMS

1. Owner suite interior not detailed (about 7 m by 6.5 m).
2. Door widths, thresholds and turning spaces not modelled.
3. Galley equipment and food storage not placed.

KEY PLAN · LONGITUDINAL

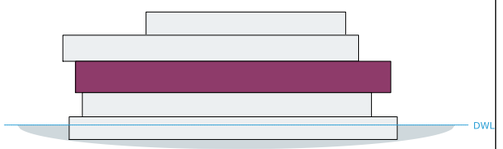

LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK
A	10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

REFERENCE DRAWINGS

P68-KETCH-D General Arrangement schematic (source of room positions)
P68-KETCH-E Vertical space schedule (deck levels)
P68-ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf
elevation-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria

P68 KETCH

68 m expedition sailing ketch · concept design

ENGINEERING DECK PLAN · MAIN / MASTER

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-03	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE decks-layout.json	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 3 of 5

TWEEN · +0.85 m

Accommodation & service · Layout resolved, cabin count open

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

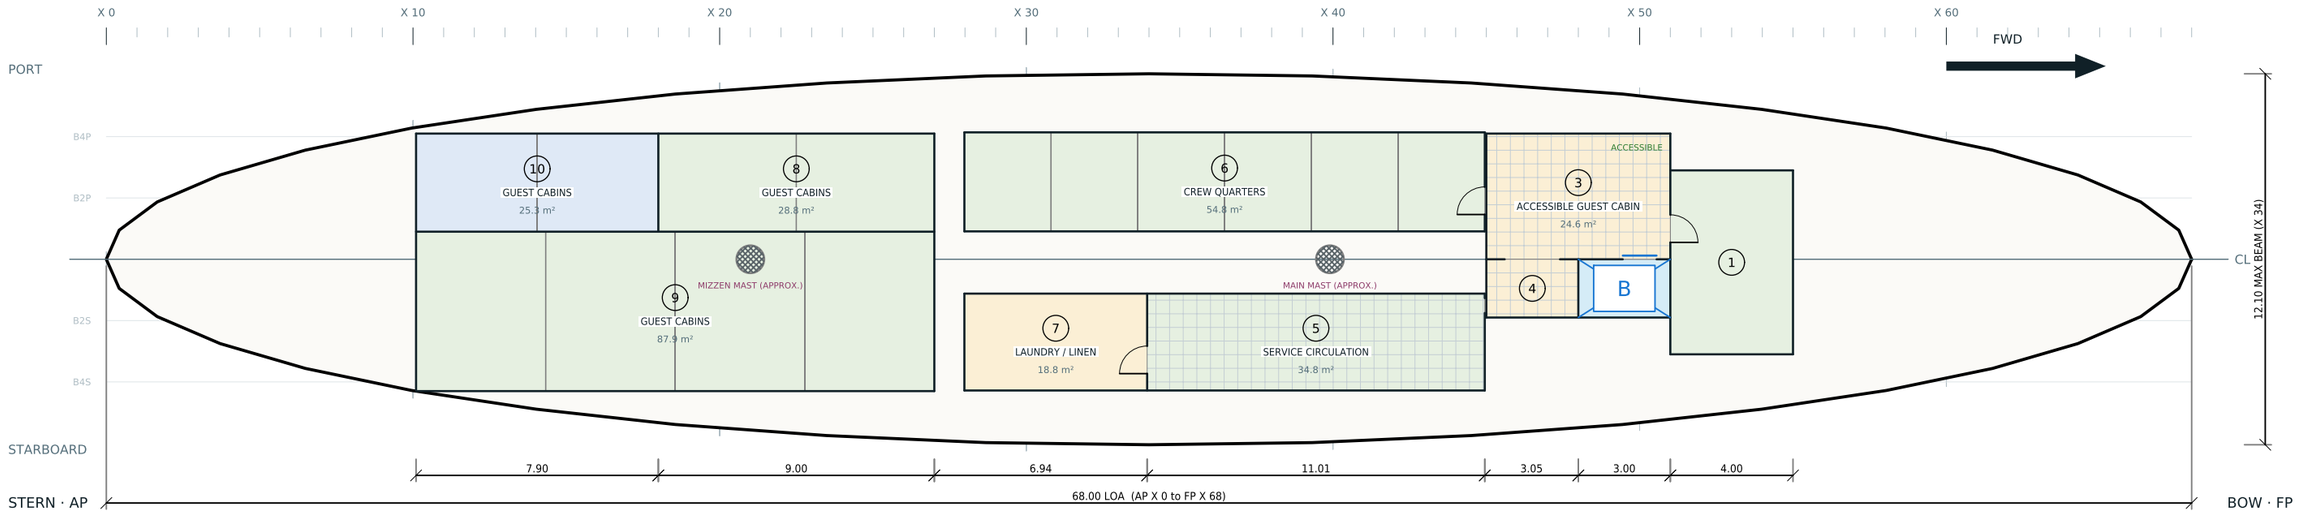

ROOM SCHEDULE

NO.	ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
1	Workshop / storage	4.00 × 6.00	24.0	Epoxy resin, anti-slip	Read from GA sheet
2	Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
3	Accessible guest cabin	6.00 × 4.10	24.6	Rift oak, matt lacquer (crew)	Inferred, to check
4	Tween lift lobby	3.00 × 1.90	5.7	Calacatta marble, book-matched	Inferred, to check
5	Service circulation	11.01 × 3.16	34.8	Rift oak, matt lacquer (crew)	Read from GA sheet
6	Crew quarters	16.97 × 3.23	54.8	Rift oak, matt lacquer (crew)	Read from GA sheet
7	Laundry / linen	5.96 × 3.16	18.8	Porcelain tile, anti-slip R11	Inferred, to check
8	Guest cabins	9.00 × 3.20	28.8	Wool-silk carpet, ivory	Read from GA sheet
9	Guest cabins	16.90 × 5.20	87.9	Wool-silk carpet, ivory	Read from GA sheet
10	Guest cabins	7.90 × 3.20	25.3	Wool-silk carpet, ivory	Resolved decision
	ASSIGNED		310.4	of 644 m² deck outline (48%)	

GENERAL NOTES

1. Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).
2. Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.
3. Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.
4. Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.
5. Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.
6. Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.


DECK STATUS

Stage	Layout resolved, cabin count open
Datum	+0.85 m above DWL, to +3.35
Zone	Accommodation & service
Assigned	310 m² of 644 m² (48%)
Rooms	5 from GA · 1 resolved · 4 inferred
Lift stops	lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 48 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Plumbing and freshwater distribution, Food storage, Tween deck accommodation, Bathroom accommodation

OPEN ITEMS

1. Guest cabin blocks (X 10 to 27) touch no corridor or lobby on the layout: a guest route to the cabins is needed.
2. Accessible cabin interior to be specified: turning space and accessible bathroom.
3. Guest cabin count and sizes not set; partitions shown are indicative.
4. ADA figures to be checked against 36 CFR Part 1191.
5. Workshop / storage (X 51 to 55) has no route on the layout; reached only past lift B.

KEY PLAN · LONGITUDINAL

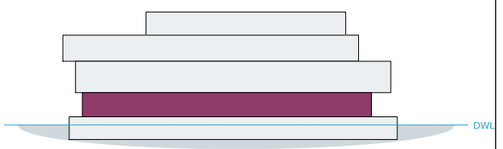

LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK
A	10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

REFERENCE DRAWINGS

P68-KETCH-D General Arrangement schematic (source of room positions)
P68-KETCH-E Vertical space schedule (deck levels)
P68-ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf
elevation-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria

P68 KETCH

68 m expedition sailing ketch · concept design

ENGINEERING DECK PLAN · TWEEN

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-04	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE decks-layout.json	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 4 of 5

TANK / TECHNICAL · −1.50 m

Low-level systems and storage · Blocks placed, machinery not placed

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

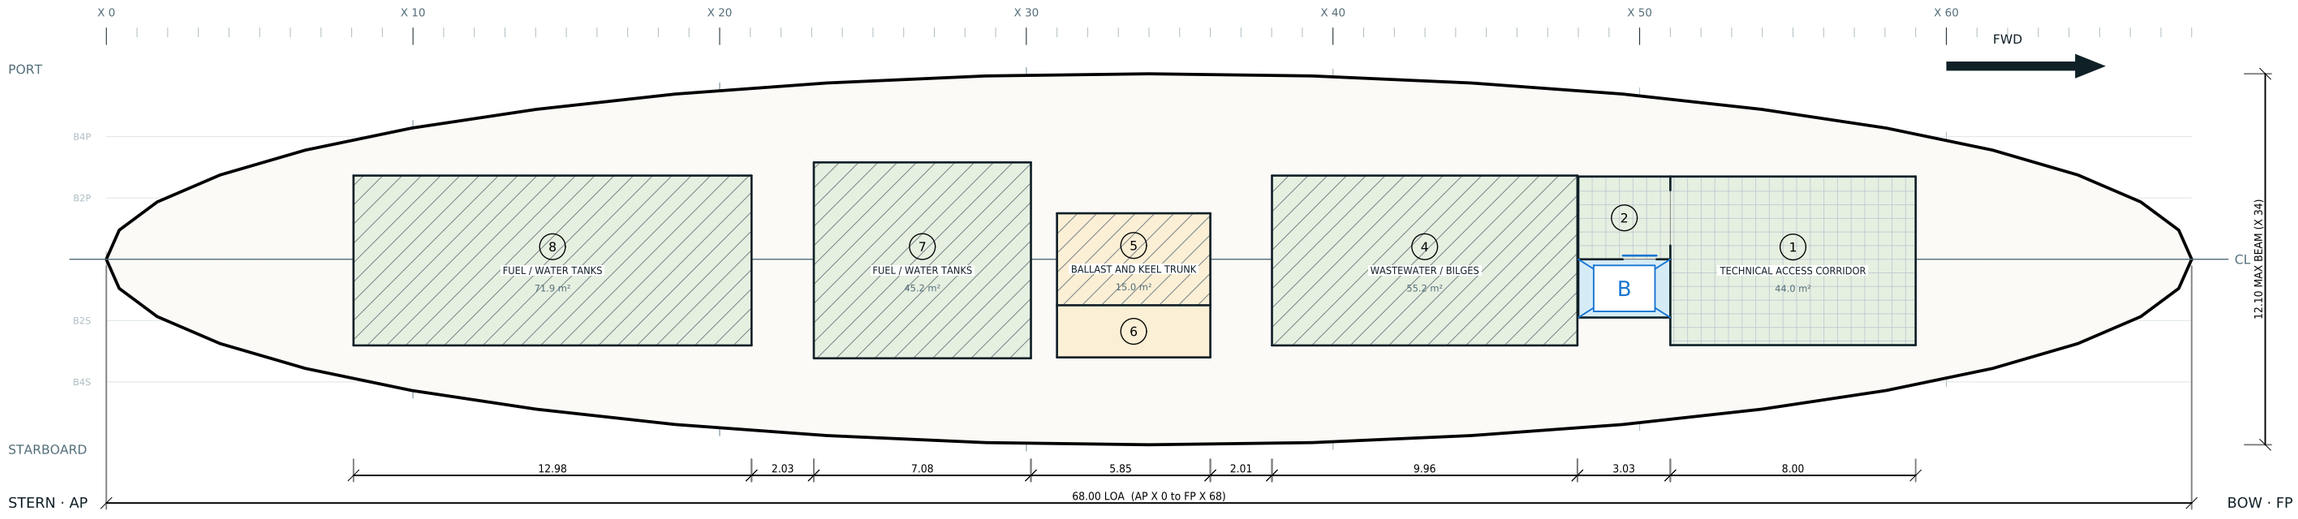

ROOM SCHEDULE

NO.	ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
1	Technical access corridor	8.00 × 5.50	44.0	Painted steel, non-slip tread plate	Read from GA sheet
2	Technical access corridor	3.00 × 2.70	8.1	Painted steel, non-slip tread plate	Read from GA sheet
3	Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
4	Wastewater / bilges	9.96 × 5.54	55.2	Tank top, coated steel (no finish)	Read from GA sheet
5	Ballast and keel trunk	5.00 × 3.00	15.0	Tank top, coated steel (no finish)	Inferred, to check
6	Pump / manifold spaces	5.00 × 1.70	8.5	Painted steel, non-slip tread plate	Inferred, to check
7	Fuel / water tanks	7.08 × 6.39	45.2	Tank top, coated steel (no finish)	Read from GA sheet
8	Fuel / water tanks	12.98 × 5.54	71.9	Tank top, coated steel (no finish)	Read from GA sheet
	ASSIGNED		253.6	of 644 m² deck outline (39%)	

GENERAL NOTES

1. Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).
2. Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.
3. Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.
4. Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.
5. Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.
6. Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.


DECK STATUS

Stage	Blocks placed, machinery not placed
Datum	−1.50 m above DWL, to +0.85
Zone	Low-level systems and storage
Assigned	254 m² of 644 m² (39%)
Rooms	5 from GA · 0 resolved · 3 inferred
Lift stops	lift B
Guest level	No: crew and technical
Layout check	PASS decks-layout.json OK: 48 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Water makers (desalination), Plumbing and freshwater distribution, Waste processing, Engineering components (general) (+2 restricted)

OPEN ITEMS

1. Propulsion, generation and battery machinery not placed on the arrangement.
2. Lifting keel trunk geometry not set; ballast block is a placeholder.
3. Tank capacities not calculated; envelopes shown are gross.

KEY PLAN · LONGITUDINAL

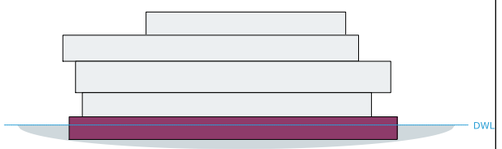

LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

REVISIONS

REV	DATE	DESCRIPTION	BY	CHK
A	10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

REFERENCE DRAWINGS

P68-KETCH-D General Arrangement schematic (source of room positions)
P68-KETCH-E Vertical space schedule (deck levels)
P68-ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf
elevation-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria

P68 KETCH

68 m expedition sailing ketch · concept design

ENGINEERING DECK PLAN · TANK / TECHNICAL

Deck status, room schedule, indicative doors and partitions

PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-05	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE decks-layout.json	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 5 of 5