
RIDGE · +9.30 m

vigation & chart lounge · Layout resolved, not dimensioned

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

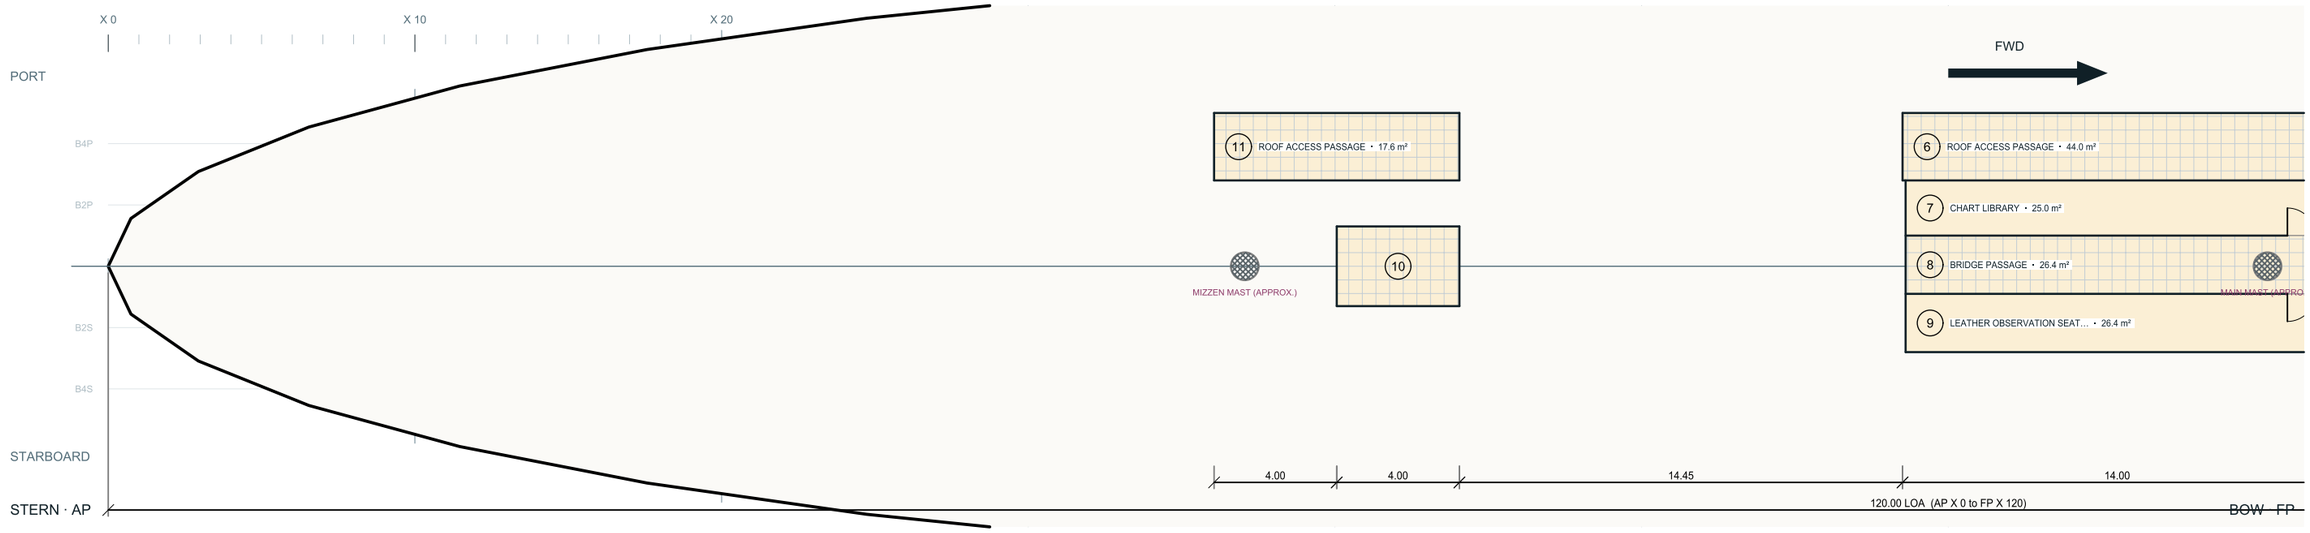

OOM SCHEDULE

ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
Mag-rail lift A	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Bridge lift lobby	6.00 × 1.80	10.8	Calacatta marble, book-matched	Inferred, to check
Bridge lift lobby	6.00 × 1.80	10.8	Calacatta marble, book-matched	Inferred, to check
Command position	5.00 × 2.00	10.0	Bookmatched walnut floor, brass inlay	Read from GA sheet
Roof access passage	20.00 × 2.20	44.0	Honed limestone, brass threshold strips	Inferred, to check
Chart library	13.90 × 1.80	25.0	Bookmatched walnut floor, brass inlay	Inferred, to check
Bridge passage	13.90 × 1.90	26.4	Honed limestone, brass threshold strips	Inferred, to check
Leather observation seating	13.90 × 1.90	26.4	Bookmatched walnut floor, brass inlay	Inferred, to check
Protected bridge access	4.00 × 2.60	10.4	Honed limestone, brass threshold strips	Inferred, to check
Roof access passage	8.00 × 2.20	17.6	Honed limestone, brass threshold strips	Inferred, to check
ASSIGNED		192.8	of 1877 m² deck outline (10%)	

NERAL NOTES

Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).

Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.

Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.

Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.

Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.

Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.

VISIONS

DATE	DESCRIPTION	BY	CHK
10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

FERENCE DRAWINGS

KETCH-D General Arrangement schematic (source of room positions)
KETCH-E Vertical space schedule (deck levels)
ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf
tion-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria


DECK STATUS

Stage	Layout resolved, not dimensioned
Datum	+9.30 m above DWL, to +11.70
Zone	Navigation & chart lounge
Assigned	193 m² of 1877 m² (10%)
Rooms	1 from GA · 0 resolved · 10 inferred
Lift stops	lift A, lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 54 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	None cleared for release (+3 restricted)

OPEN ITEMS

1. Roof level (+9.30 m) assumed equal to the Bridge floor; not confirmed on any sheet.
2. Roof access door sits about 0.5 m outboard of the roof edge: check the roof outline.
3. Window glare at the command position not checked.
4. Positions read from the schematic at about 14 px per metre.

KEY PLAN · LONGITUDINAL



LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

P68 KETCH

120 m expedition four-mast ketch · concept design

ENGINEERING DECK PLAN · BRIDGE

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-01	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE this sheet (source of truth)	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 1 of 5

OMMANDER / LIDO · +6.60 m

ward lookout · aft hospitality · Layout resolved, roof under design

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

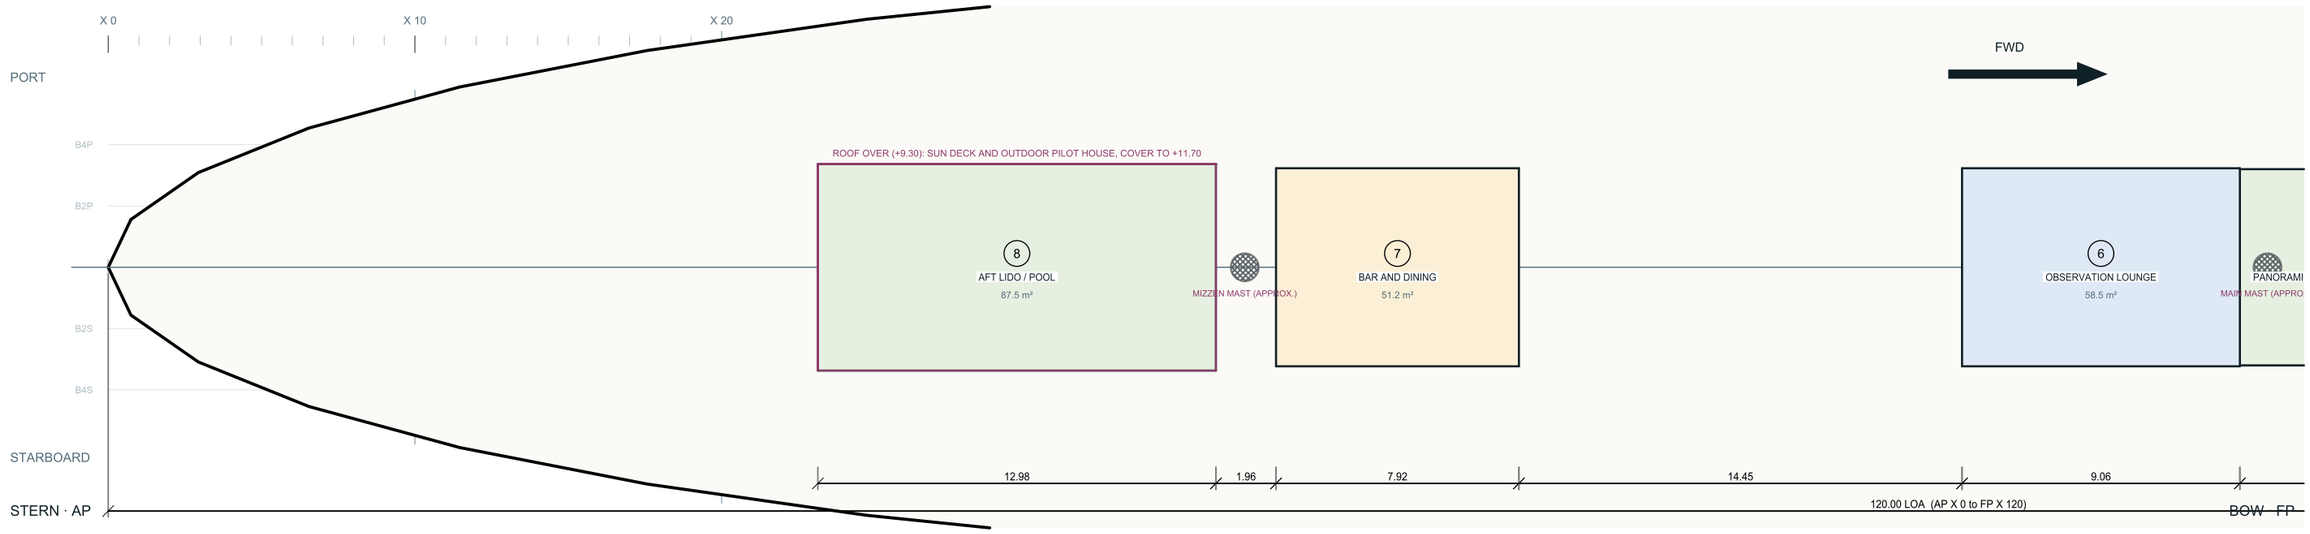

OOM SCHEDULE

ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
Panoramic forward lookout	2.00 × 6.40	12.8	Bookmatched walnut floor, brass inlay	Read from GA sheet
Mag-rail lift A	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Commander lift lobby	3.00 × 6.40	19.2	Calacatta marble, book-matched	Inferred, to check
Panoramic forward lookout	6.00 × 6.40	38.4	Bookmatched walnut floor, brass inlay	Read from GA sheet
Observation lounge	9.06 × 6.46	58.5	Bookmatched walnut floor, brass inlay	Resolved decision
Bar and dining	7.92 × 6.46	51.2	Laid teak deck, caulked seams	Inferred, to check
Aft Lido / pool	12.98 × 6.74	87.5	Laid teak deck, caulked seams	Read from GA sheet
ASSIGNED		279.0	of 1877 m² deck outline (15%)	

NERAL NOTES

Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).

Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.

Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.

Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.

Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.

Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.

VISIONS

DATE	DESCRIPTION	BY	CHK
10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

FERENCE DRAWINGS

KETCH-D General Arrangement schematic (source of room positions)

KETCH-E Vertical space schedule (deck levels)

ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf

tion-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria


DECK STATUS

Stage	Layout resolved, roof under design
Datum	+6.60 m above DWL, to +9.30
Zone	Forward lookout · aft hospitality
Assigned	279 m² of 1877 m² (15%)
Rooms	3 from GA · 1 resolved · 4 inferred
Lift stops	lift A, lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 54 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Glassware storage (+3 restricted)

OPEN ITEMS

1. Pilot house cover footprint not set; roof extent shown.
2. Roof: second escape route, guard rails and crowd load not designed.
3. Pool mass and free surface to be engineered.
4. Mizzen interface with the aft deck structure unresolved.

KEY PLAN · LONGITUDINAL



LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

P68 KETCH

120 m expedition four-mast ketch · concept design

ENGINEERING DECK PLAN · COMMANDER / LIDO

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO.	REVISION
P68-ENG-02	A · draft 00
SCALE	DATE
1:200 @ A3	10 Oct 2026
SOURCE	DATUM
this sheet (source of truth)	DWL · X from AP
STATUS	SHEET
Concept · for review	2 of 5

AIN / MASTER · +3.35 m

ner and social spaces · Layout resolved, interiors not detailed

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

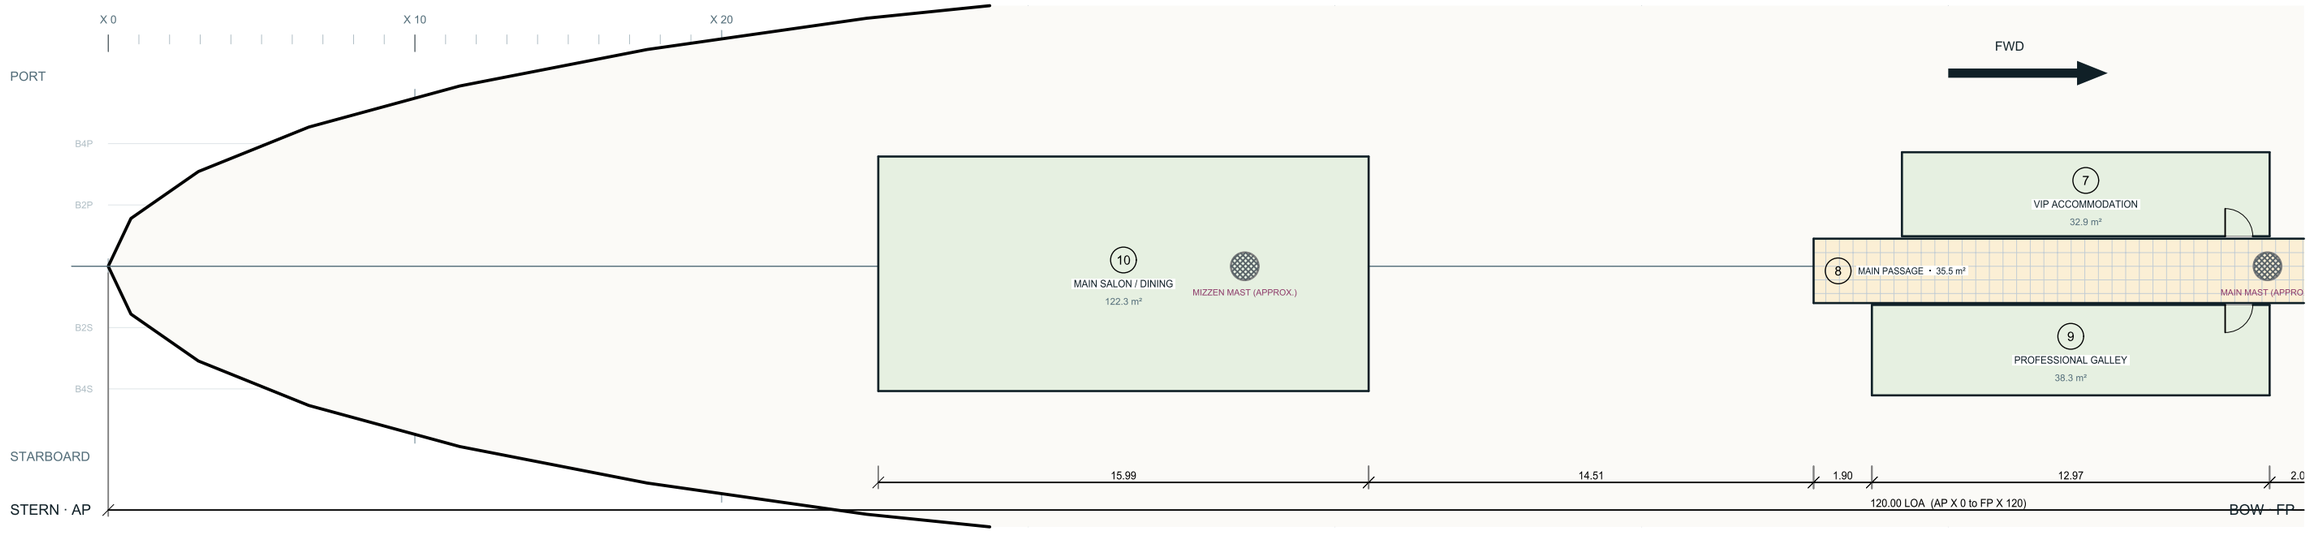

OOM SCHEDULE

ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
Owner suite	7.00 × 6.50	45.5	Wool-silk carpet, ivory	Resolved decision
Main lift lobby	3.00 × 1.10	3.3	Calacatta marble, book-matched	Inferred, to check
Mag-rail lift A	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Main lift lobby	3.00 × 1.60	4.8	Calacatta marble, book-matched	Inferred, to check
Main lift lobby	6.00 × 6.50	39.0	Calacatta marble, book-matched	Inferred, to check
VIP accommodation	11.99 × 2.74	32.9	Wool-silk carpet, ivory	Read from GA sheet
Main passage	16.90 × 2.10	35.5	Honed limestone, brass threshold strips	Inferred, to check
Professional galley	12.97 × 2.95	38.3	Porcelain tile, anti-slip R11	Read from GA sheet
Main salon / dining	15.99 × 7.65	122.3	Bookmatched walnut floor, brass inlay	Read from GA sheet
ASSIGNED		332.9	of 1877 m² deck outline (18%)	

NERAL NOTES

Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).

Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.

Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.

Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.

Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.

Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.

VISIONS

DATE	DESCRIPTION	BY	CHK
10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

FERENCE DRAWINGS

KETCH-D General Arrangement schematic (source of room positions)
KETCH-E Vertical space schedule (deck levels)
ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf
tion-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria

DECK STATUS

Stage	Layout resolved, interiors not detailed
Datum	+3.35 m above DWL, to +6.60
Zone	Owner and social spaces
Assigned	333 m² of 1877 m² (18%)
Rooms	3 from GA · 1 resolved · 6 inferred
Lift stops	lift A, lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 54 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Food waste processing, Food storage, Kitchen accommodation, Bathroom accommodation (+1 restricted)

OPEN ITEMS

1. Owner suite interior not detailed (about 7 m by 6.5 m).
2. Door widths, thresholds and turning spaces not modelled.
3. Galley equipment and food storage not placed.

KEY PLAN · LONGITUDINAL



LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

P68 KETCH

120 m expedition four-mast ketch · concept design

ENGINEERING DECK PLAN · MAIN / MASTER

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-03	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE this sheet (source of truth)	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 3 of 5

WEEN · +0.85 m

ommodation & service · Layout resolved, cabin count open

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

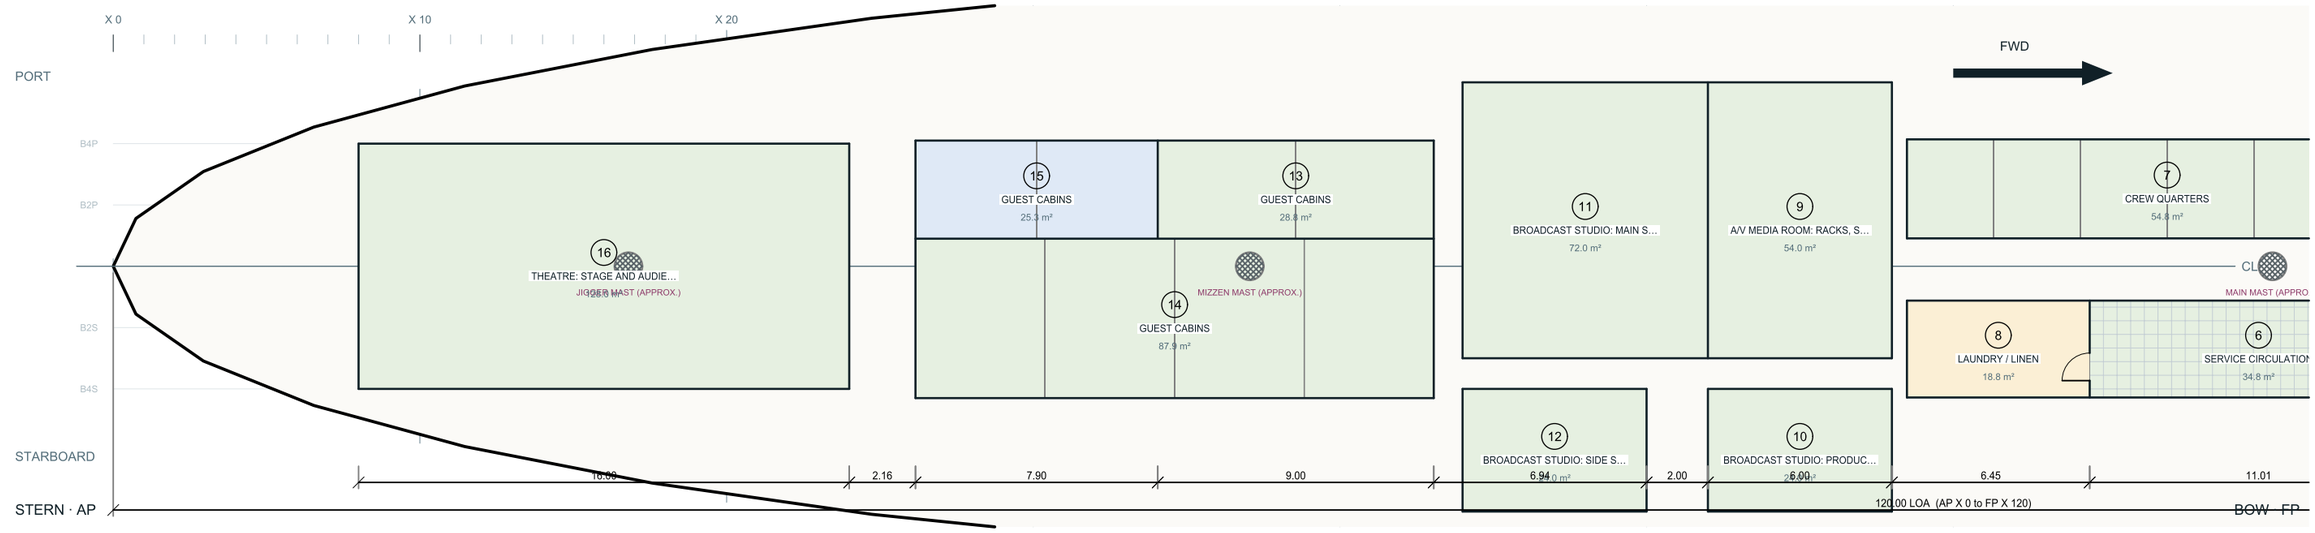

OOM SCHEDULE

ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
Cinema: screening room	12.00 × 8.00	96.0	Wool-silk carpet, ivory	Read from GA sheet
Workshop / storage	4.00 × 6.00	24.0	Epoxy resin, anti-slip	Read from GA sheet
Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Accessible guest cabin	6.00 × 4.10	24.6	Rift oak, matt lacquer (crew)	Inferred, to check
Tween lift lobby	3.00 × 1.90	5.7	Calacatta marble, book-matched	Inferred, to check
Service circulation	11.01 × 3.16	34.8	Rift oak, matt lacquer (crew)	Read from GA sheet
Crew quarters	16.97 × 3.23	54.8	Rift oak, matt lacquer (crew)	Read from GA sheet
Laundry / linen	5.96 × 3.16	18.8	Porcelain tile, anti-slip R11	Inferred, to check
A/V media room: racks, servers and storage	6.00 × 9.00	54.0	Epoxy resin, anti-slip	Read from GA sheet
Broadcast studio: production control	6.00 × 4.00	24.0	Epoxy resin, anti-slip	Read from GA sheet
Broadcast studio: main stage	8.00 × 9.00	72.0	Epoxy resin, anti-slip	Read from GA sheet
Broadcast studio: side stage	6.00 × 4.00	24.0	Epoxy resin, anti-slip	Read from GA sheet
Guest cabins	9.00 × 3.20	28.8	Wool-silk carpet, ivory	Read from GA sheet
Guest cabins	16.90 × 5.20	87.9	Wool-silk carpet, ivory	Read from GA sheet
Guest cabins	7.90 × 3.20	25.3	Wool-silk carpet, ivory	Resolved decision
Theatre: stage and audience	16.00 × 8.00	128.0	Wool-silk carpet, ivory	Read from GA sheet
ASSIGNED		708.4	of 1877 m² deck outline (38%)	

NERAL NOTES

Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).

Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.

Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.

Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.

Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.

Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.

VISIONS

DATE	DESCRIPTION	BY	CHK
10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

FERENCE DRAWINGS

KETCH-D General Arrangement schematic (source of room positions)

KETCH-E Vertical space schedule (deck levels)

ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf

tion-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria


DECK STATUS

Stage	Layout resolved, cabin count open
Datum	+0.85 m above DWL, to +3.35
Zone	Accommodation & service
Assigned	708 m² of 1877 m² (38%)
Rooms	11 from GA · 1 resolved · 4 inferred
Lift stops	lift B
Guest level	Yes: accessible route required
Layout check	PASS decks-layout.json OK: 54 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Plumbing and freshwater distribution, Food storage, Tween deck accommodation, Bathroom accommodation

OPEN ITEMS

1. Guest cabin blocks (X 10 to 27) touch no corridor or lobby on the layout: a guest route to the cabins is needed.
2. Accessible cabin interior to be specified: turning space and accessible bathroom.
3. Guest cabin count and sizes not set; partitions shown are indicative.
4. ADA figures to be checked against 36 CFR Part 1191.
5. Workshop / storage (X 51 to 55) has no route on the layout; reached only past lift B.

KEY PLAN · LONGITUDINAL

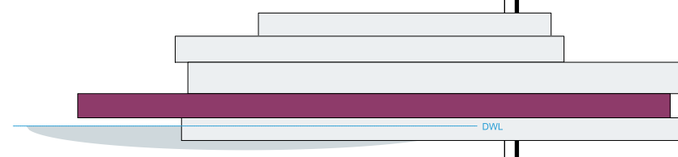

LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

P68 KETCH

120 m expedition four-mast ketch · concept design

ENGINEERING DECK PLAN · TWEEN

Deck status, room schedule, indicative doors and partitions


PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-04	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE this sheet (source of truth)	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 4 of 5

ANK / TECHNICAL · −1.50 m

w-level systems and storage · Blocks placed, machinery not placed

CONCEPT · PROVISIONAL GENERAL ARRANGEMENT · DRAFT 00

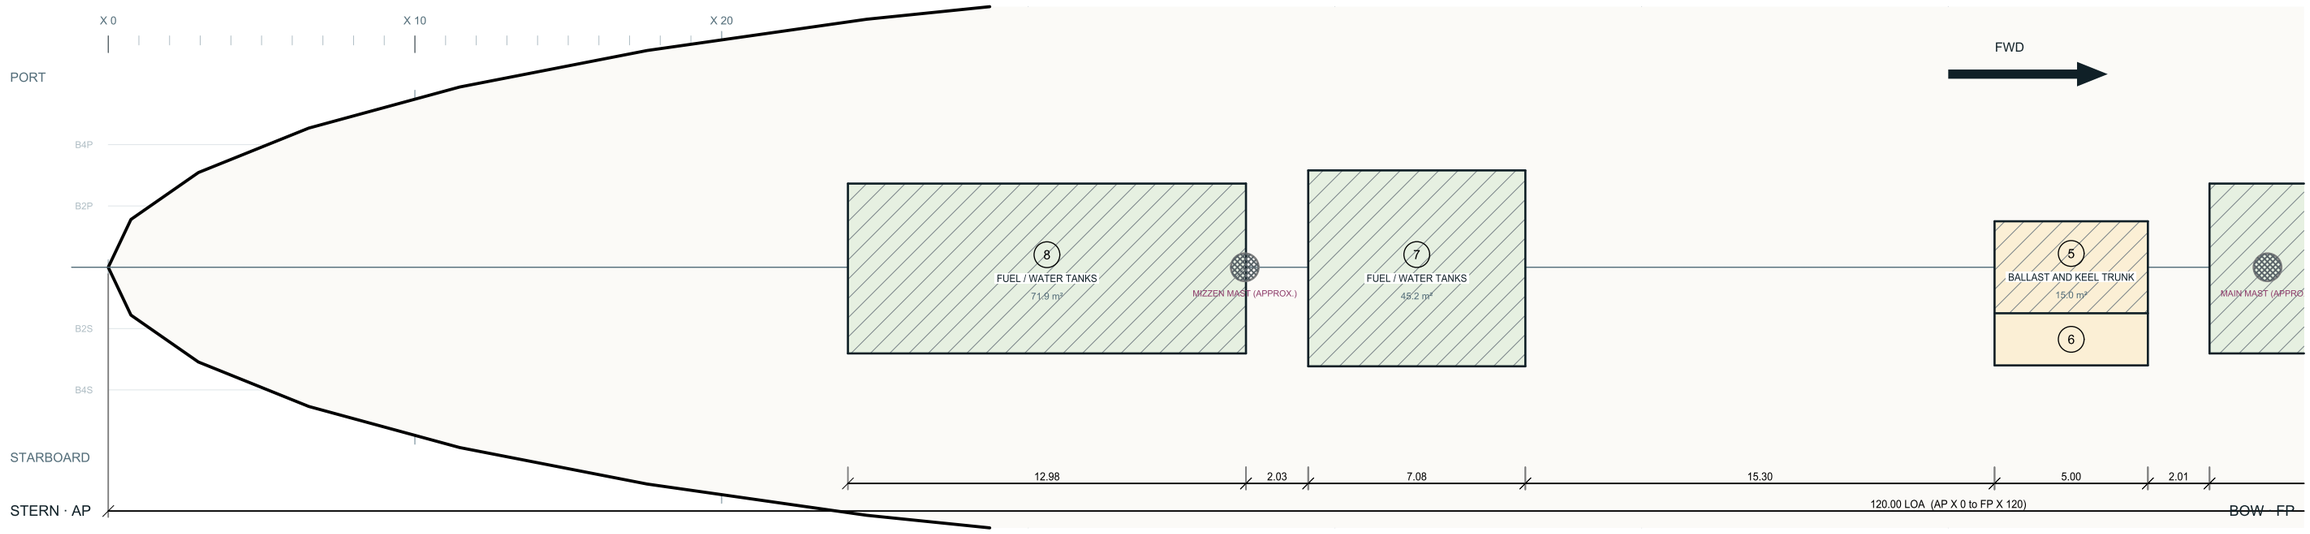

OOM SCHEDULE

ROOM	L × B (m)	AREA m²	FLOOR FINISH (PROPOSED)	STATUS
Technical access corridor	8.00 × 5.50	44.0	Painted steel, non-slip tread plate	Read from GA sheet
Technical access corridor	3.00 × 2.70	8.1	Painted steel, non-slip tread plate	Read from GA sheet
Mag-rail lift B	3.00 × 1.90	5.7	Lift car: brushed brass, stone floor	Inferred, to check
Wastewater / bilges	9.96 × 5.54	55.2	Tank top, coated steel (no finish)	Read from GA sheet
Ballast and keel trunk	5.00 × 3.00	15.0	Tank top, coated steel (no finish)	Inferred, to check
Pump / manifold spaces	5.00 × 1.70	8.5	Painted steel, non-slip tread plate	Inferred, to check
Fuel / water tanks	7.08 × 6.39	45.2	Tank top, coated steel (no finish)	Read from GA sheet
Fuel / water tanks	12.98 × 5.54	71.9	Tank top, coated steel (no finish)	Read from GA sheet
ASSIGNED		253.6	of 1877 m² deck outline (14%)	

NERAL NOTES

Dimensions in metres. X is measured from the aft perpendicular (AP, X 0) toward the bow; Y is positive to port. Levels are above the design waterline (DWL).

Room positions were read from the General Arrangement schematic (P68-KETCH-D) at about 14 px per metre. They are not dimensioned. Do not scale for construction.

Doors and partitions are indicative and placed by rule: one 0.90 m door per room onto the nearest route. Clear widths exceed the 0.815 m ADA minimum.

Lift shafts are schematic footprints. Cars are shown at 1.5 × 2.0 m internal, which clears the ADA minimum of 1.372 × 1.73 m.

Mast positions are approximate, read from the longitudinal section. Tank outlines are gross envelopes; capacities are not calculated.

Room data (status, finish, furniture) is stored as P68 XDATA on each A-AREA polyline. Regenerate with npm run build:cad.

VISIONS

DATE	DESCRIPTION	BY	CHK
10 Oct 2026	First issue. Generated from layout/decks-layout.json, draft 00.	P68	—

FERENCE DRAWINGS

KETCH-D General Arrangement schematic (source of room positions)

KETCH-E Vertical space schedule (deck levels)

ENG-01 to 05 Engineering deck plans, this set · drawings/cad/*.dxf

tion-port.svg, elevation-aft.svg Schematic elevations · layout/accessibility.json Criteria

DECK STATUS

Stage	Blocks placed, machinery not placed
Datum	−1.50 m above DWL, to +0.85
Zone	Low-level systems and storage
Assigned	254 m² of 1877 m² (14%)
Rooms	5 from GA · 0 resolved · 3 inferred
Lift stops	lift B
Guest level	No: crew and technical
Layout check	PASS decks-layout.json OK: 54 rooms across 5 decks, no overlaps, all inside outlines
Access check	PASS Accessibility: no gaps against the current criteria
Systems	Water makers (desalination), Plumbing and freshwater distribution, Waste processing, Engineering components (general) (+2 restricted)

OPEN ITEMS

1. Propulsion, generation and battery machinery not placed on the arrangement.
2. Lifting keel trunk geometry not set; ballast block is a placeholder.
3. Tank capacities not calculated; envelopes shown are gross.

KEY PLAN · LONGITUDINAL



LEGEND

- Room read from the GA sheet
- Resolved decision
- Inferred from schematic, to check
- Route: lobby, passage, corridor
- Tank or void, gross envelope
- Lift shaft, car 1.5 × 2.0 m
- Indicative door, 0.90 m leaf
- Indicative partition, count not set
- (3) Room tag, see schedule

P68 KETCH

120 m expedition four-mast ketch · concept design

ENGINEERING DECK PLAN · TANK / TECHNICAL

Deck status, room schedule, indicative doors and partitions

PROVISIONAL SCHEMATIC · NOT FOR CONSTRUCTION · NOT FOR FABRICATION

DRAWING NO. P68-ENG-05	REVISION A · draft 00
SCALE 1:200 @ A3	DATE 10 Oct 2026
SOURCE this sheet (source of truth)	DATUM DWL · X from AP
STATUS Concept · for review	SHEET 5 of 5